

# RKP-C110 Series

Rackmount computers with 11th Gen Intel® Core™ Tiger Lake processor base model and high-interface models



## Features and Benefits

- 1U rackmount computer with fanless design
- 11th Gen Intel® Celeron®, or Intel® Core™ i3, i5, or i7 processor
- Rich interface options for up to 12 LAN ports and up to 10 serial ports
- 12/24 VDC and dual 100 to 240 VAC/VDC power input options
- Unified front-panel connectivity design for easy access of interfaces
- -30 to 60°C operating temperature range

## Certifications



## Introduction


The RKP-C110 rackmount computers are powered by 11th Gen Intel® Celeron®, or Intel® Core™ i3, i5, or i7 processor. The computers come with a rich set of interface options including up to 12 Gigabit Ethernet ports, 10 software-selectable RS-232/422/485 serial ports, 8 digital inputs and 8 digital outputs, and two kinds of power input options, 12/24 VDC and 100 to 240 VAC/VDC (power module). The communication interfaces are all located on the front panel for enabling easy access and convenient expansion for industrial applications. Two hand-rotated 2.5" SSD storages and an outer replaceable RTC battery design deliver a reliable, durable, and versatile platform for a more user-friendly option.

Designed as 1U standard form factor fanless rackmount computers with an operating temperature range of -30 to 60°C and a build-in TPM 2.0 module, the RKP-C110 computers are ideal as reliable and secure computing platforms for industrial applications in extreme operating environments.


## Appearance

### Front View


#### RKP-C110-C1-T/C3-T/C5-T/C7-T/C1-T-Win10/C3-T-Win10/C5-T-Win10/C7-T-Win10 Models

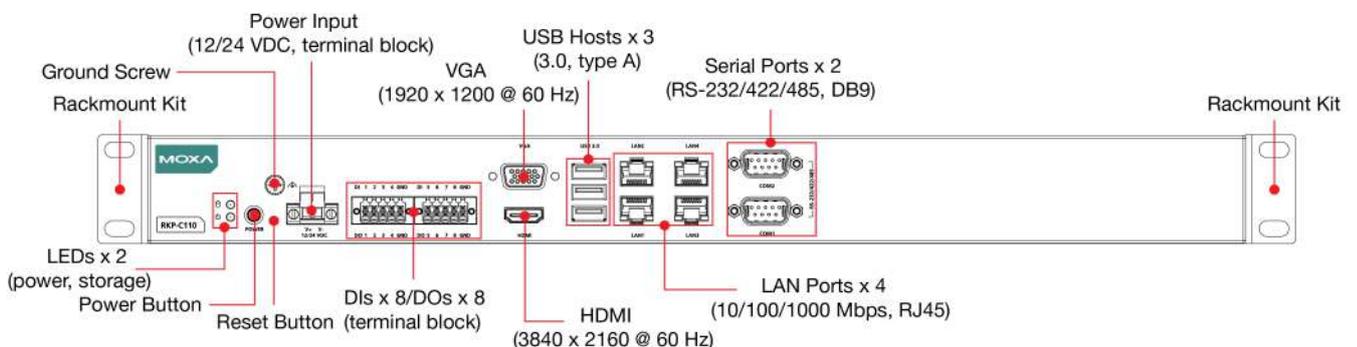


### RKP-C110-C1-8L-T/C3-8L-T/C5-8L-T/C7-8L-T Models

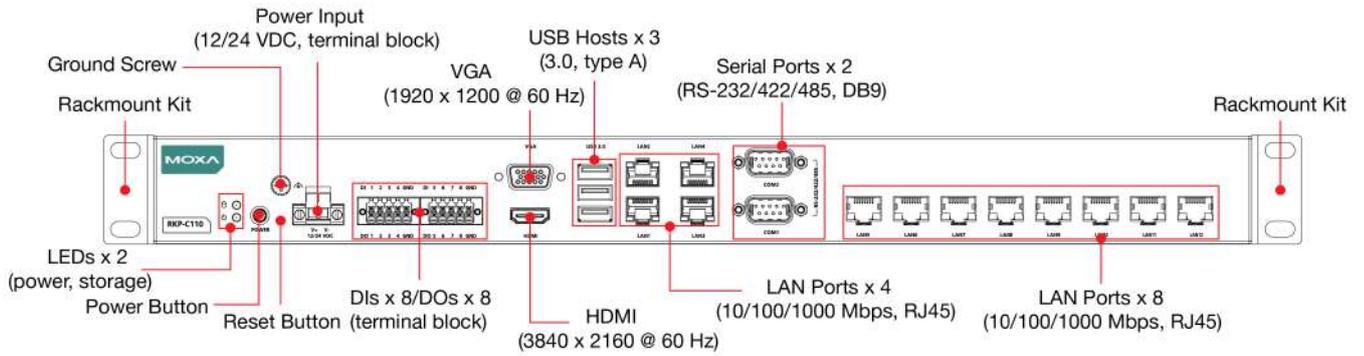


### RKP-C110-C1-8C-T/C3-8C-T/C5-8C-T/C7-8C-T Models

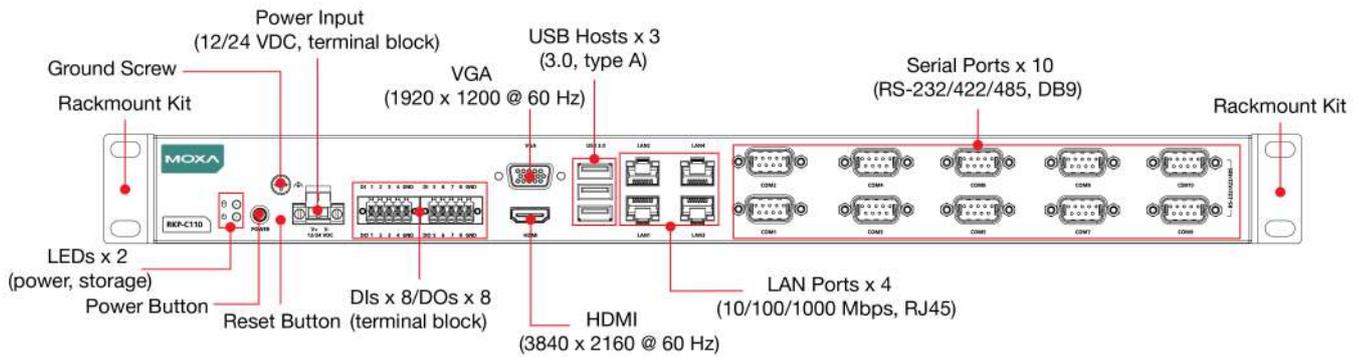

### RKP-C110-C1-2L4C-T/C3-2L4C-T/C5-2L4C-T/C7-2L4C-T Models

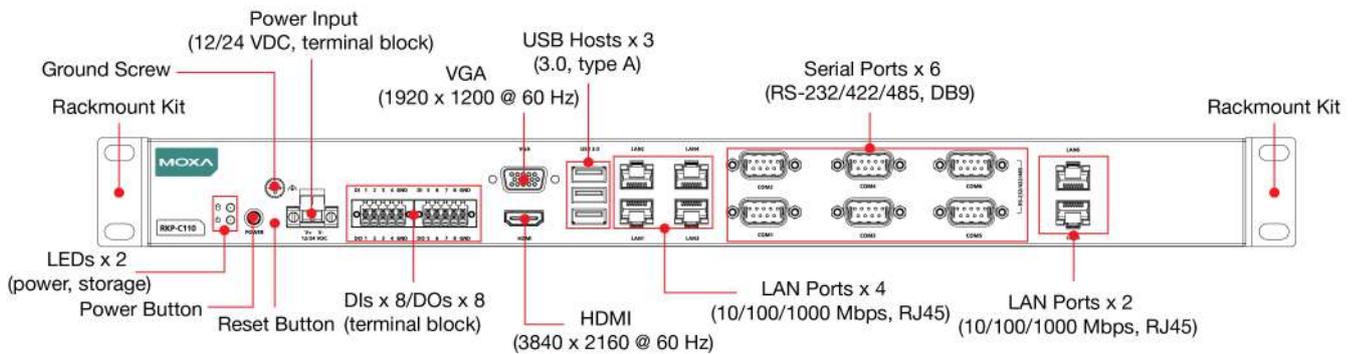


### RKP-C110-C1-2HV-T/C3-2HV-T/C5-2HV-T/C7-2HV-T Models

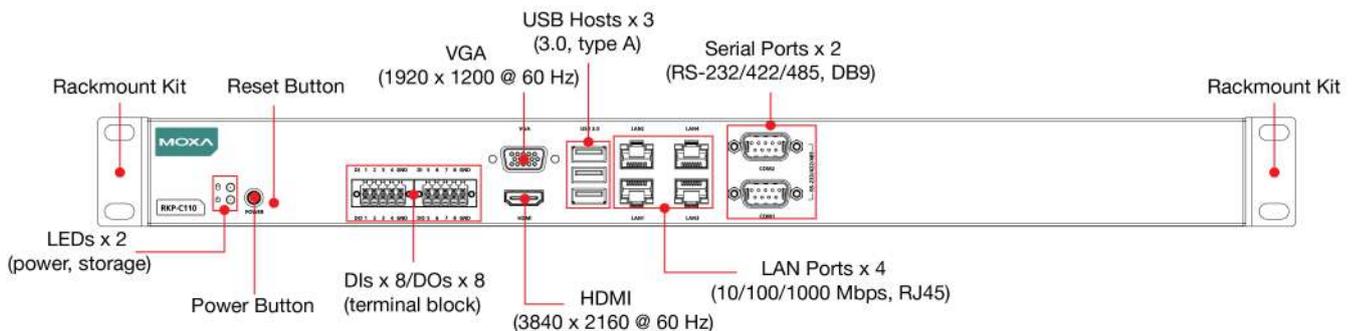


## RearView

### RKP-C110-C1-2HV-T/C3-2HV-T/C5-2HV-T/C7-2HV-T Models

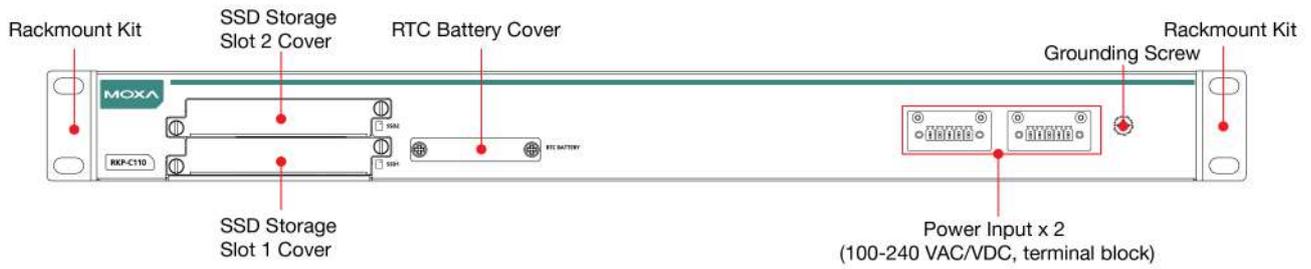

### All Other Models

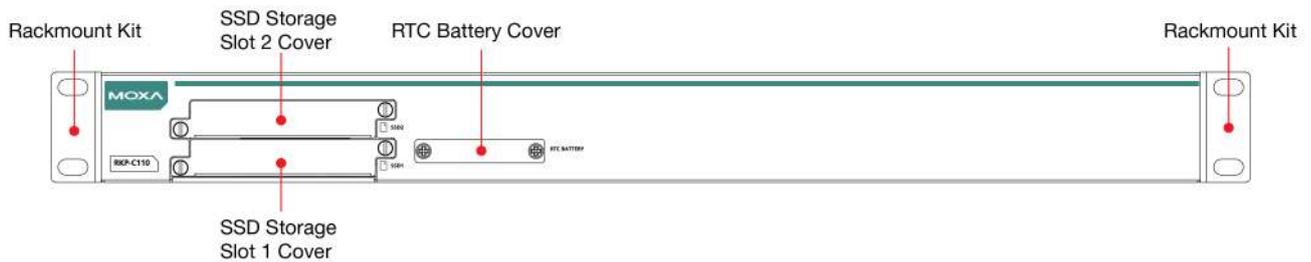

## Specifications

### Computer

CPU	RKP-C110-C1 models: Intel® Celeron® 6305E "(Dual core, 4M cache, 1.80 GHz) RKP-C110-C3 models: Intel® Core™ i3-1115G4E (Quad core, 4M cache, 3 GHz, Base: 2.20 GHz) RKP-C110-C5 models: Intel® Core™ i5-1145G7E (Quad core, 8M cache, 2.60 GHz, Base: 1.50 GHz) RKP-C110-C7 models: Intel® Core™ i7-1185G7E (Quad core, 12M cache, 2.80 GHz, Base: 1.80 GHz)
System Memory Slot	SODIMM DDR4 slots x 1, up to 32 GB max.
System Memory Pre-installed	8 GB DDR4
Storage Slot	2.5-inch SSD slots x 2 (SATAIII interface) RAID 0/1 support
Supported OS	Windows images and drivers supported: - Windows 11 IoT Ent LTSC 2024 64-bit - Windows 10 IoT Ent LTSC 2021 64-bit - Windows 11 Professional 64-bit - Windows Server 2022 (driver support only)  Linux image supported: - Debian 11 (kernel 5.10)  Linux drivers supported: - Debian 12 (kernel 6.10) - Ubuntu 22.04 LTS/HWE - RHEL 9 (kernel 5.14)
Graphics Controller	Intel® Iris® Xe Graphics

## Computer Interface

Ethernet Ports	RKP-C110-C1-8L-T/C3-8L-T/C5-8L-T/C7-8L-T models: Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 12 RKP-C110-C1-2L4C-T/C3-2L4C-T/C5-2L4C-T/C7-2L4C-T models: Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 6 All other models: Auto-sensing 10/100/1000 Mbps ports (RJ45 connector) x 4
Serial Ports	RKP-C110-C1-8C-T/C3-8C-T/C5-8C-T/C7-8C-T models: RS-232/422/485 ports x 10, software selectable (DB9 male) RKP-C110-C1-2L4C-T/C3-2L4C-T/C5-2L4C-T/C7-2L4C-T models: RS-232/422/485 ports x 6, software selectable (DB9 male) All other models: RS-232/422/485 ports x 2, software selectable (DB9 male)
USB 3.0	USB 3.0 hosts x 3, type-A connectors
Digital Input	DIs x 8
Digital Output	DOs x 8
TPM	TPM v2.0
Video Output	HDMI 2.0b x 1, (type A connector) VGA x 1, 15-pin D-sub connector (female)
Buttons	Reset button Power button

## Ethernet Interface

Magnetic Isolation Protection	1.5 kV (built-in)
-------------------------------	-------------------

## Serial Interface

Baudrate	50 bps to 115.2 kbps
Connector	DB9 male
Data Bits	5, 6, 7, 8
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 1.5, 2
Flow Control	RTS/CTS, XON/XOFF

## Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

## Digital Inputs

Connector	Spring-type Euroblock terminal
Sensor Type	Dry contact
Dry Contact	Logic 0: Short to GND Logic 1: Open


Digital Outputs	
Connector	Spring-type Euroblock terminal
I/O Type	Sink
Current Rating	200 mA per channel
Voltage	0 to 24 VDC
LED Indicators	
System	Power x 1 Storage x 1
LAN	2 per port (10/100/1000 Mbps)
Power Parameters	
Input Voltage	12/24 VDC 2HV-T models: 100 to 240 VAC/VDC
Power Connector	Screw-fastened Euroblock terminal
Power Consumption	90 W
Physical Characteristics	
Housing	Metal
IP Rating	IP20
Dimensions	440 x 230 x 43.6 mm (17.32 x 9.06 x 1.72 in) 2HV-T models: 440 x 360 x 43.65 mm (17.32 x 14.17 x 1.72 in)
Weight	RKP-C110-C1-8C-T/C3-8C-T/C5-8C-T/C7-8C-T models: 3,610 g (7.95 lb) RKP-C110-C1-2L4C-T/C3-2L4C-T/C5-2L4C-T/C7-2L4C-T models: 3,540 g (7.80 lb) RKP-C110-C1-8L-T/C3-8L-T/C5-8L-T/C7-8L-T models: 3,800 g (8.37 lb) RKP-C110-C1-T/C3-T/C5-T/C7-T/C1-T-Win10/C3-T-Win10/C5-T-Win10/C7-T-Win10 models: 3,350 g (7.38 lb) RKP-C110-C1-2HV-T/C3-2HV-T/C5-2HV-T/C7-2HV-T models: 5,616 g (12.38 lb)
Installation	Rack mounting (standard 1U)
Environmental Limits	
Operating Temperature	-30 to 60°C (-22 to 140°F)
Storage Temperature	-40 to 75°C (-40 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A BSMI
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 0.5 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 0.5 kV, Signal: 1 kV IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF: 1 A/m at 50 to 60 Hz

Safety	IEC 62368-1 UL 62368-1 BSMI
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-64
Package Drop Test	ISTA 1A
Package Vibration Test	ISTA 1A
<b>Declaration</b>	
Green Product	RoHS, CRoHS, WEEE
<b>Reliability</b>	
Time Source	Built-in RTC (real-time clock) with lithium-battery backup
Automatic Reboot Trigger	Built-in WDT
<b>MTBF</b>	
Time	493,336 2HV-T models: 1,435,365 hrs hrs
Standards	Telcordia (Bellcore), GB
<b>Warranty</b>	
Warranty Period	3 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>
<b>Package Contents</b>	
Device	1 x RKP-C110 Series computer
Installation Kit	2 x terminal block, 10-pin for DI/DOs 1 x terminal block, 2-pin for DC power (non-2HV models only) 1 x terminal block, 5-pin for AC/DC power (2HV models only) 2 x rack-mounting ears with 16 screws (2HV models only)
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions


RKP-C110-C1-T/C3-T/C5-T/C7-T/C1-T-Win10/C3-T-Win10/C5-T-Win10/C7-T-Win10 Models

Unit: mm (inch)

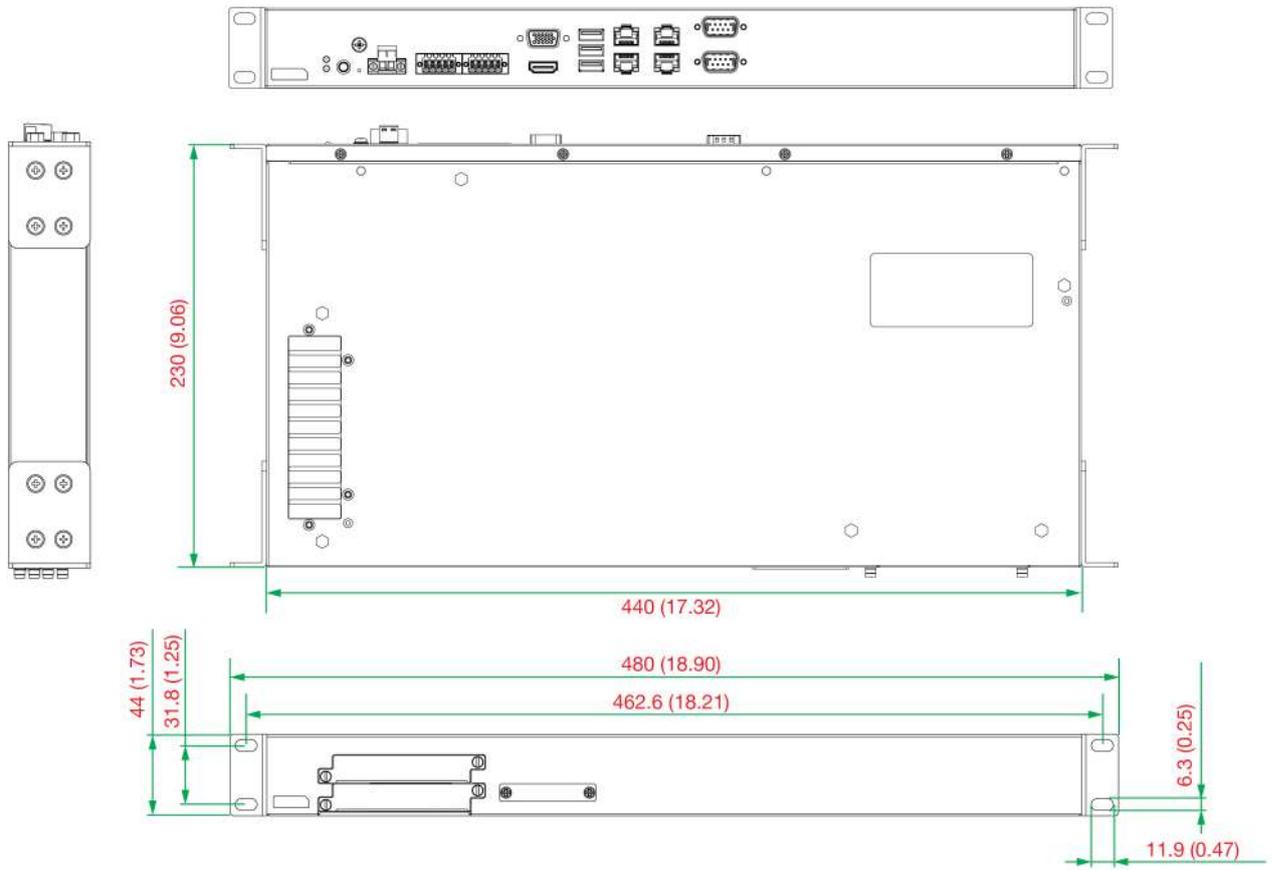


# RKP-C110-C1-2HV-T/C3-2HV-T/C5-2HV-T/C7-2HV-T Models

Unit: mm (inch)

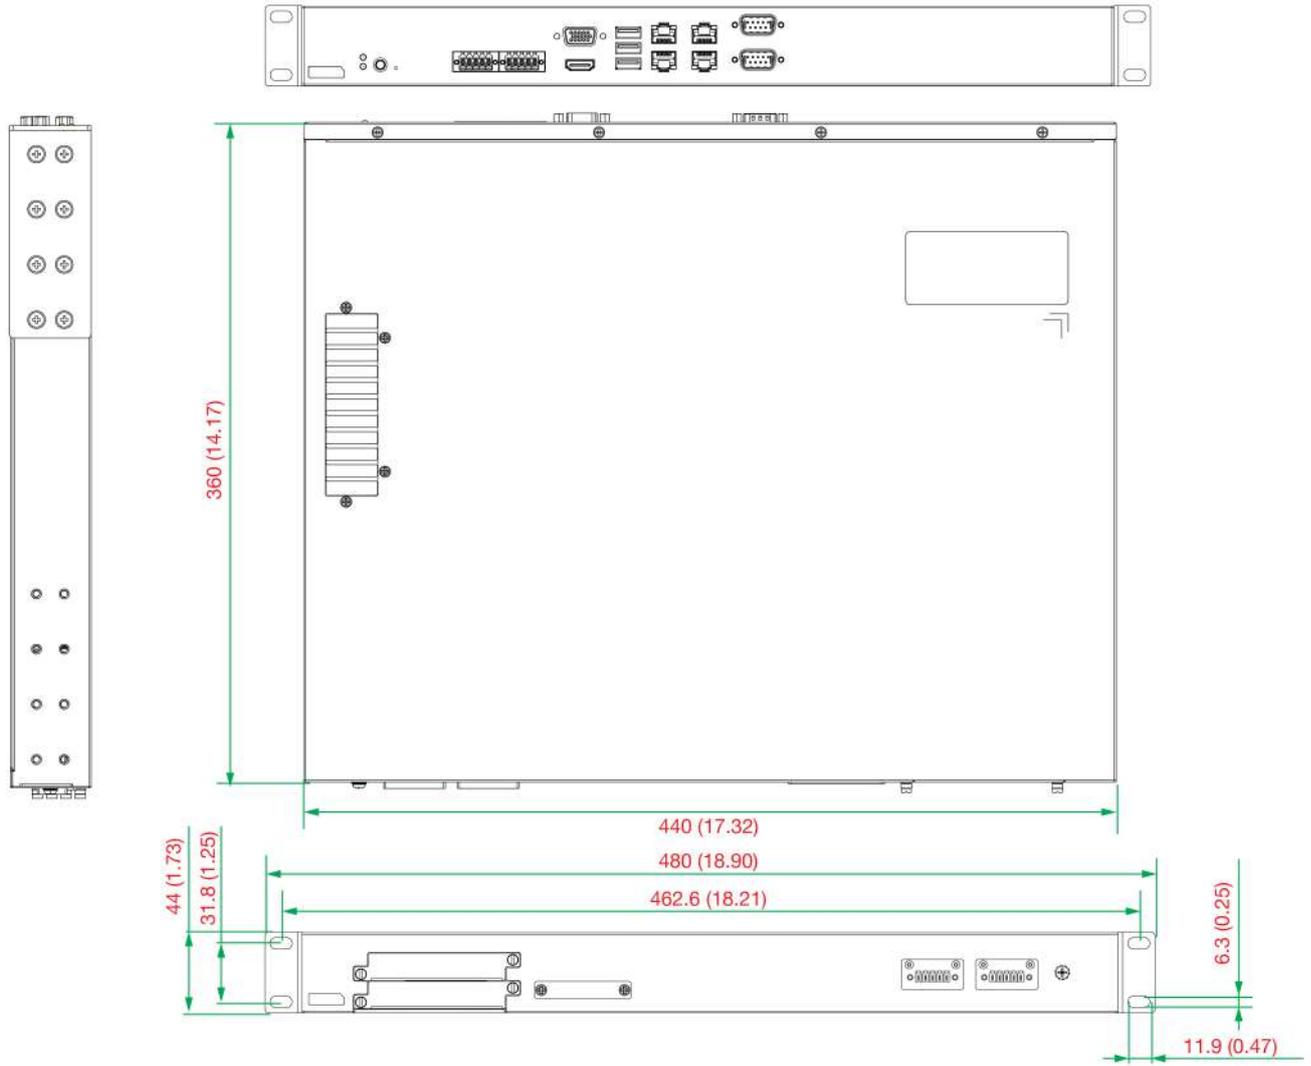


**RKP-C110-C1-8L-T/C3-8L-T/C5-8L-T/C7-8L-T Models**

Unit: mm (inch)

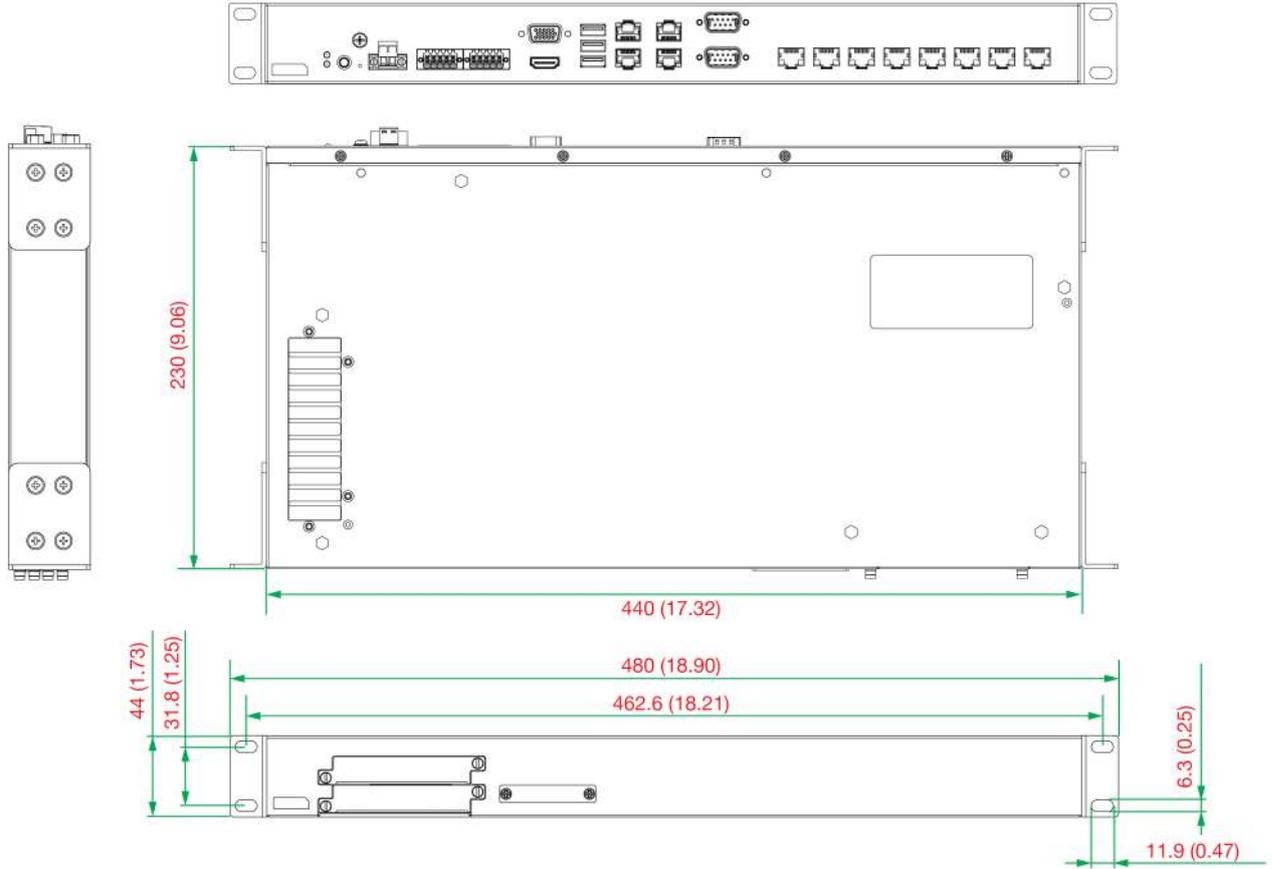


**RKP-C110-C1-8C-T/C3-8C-T/C5-8C-T/C7-8C-T Models**

Unit: mm (inch)

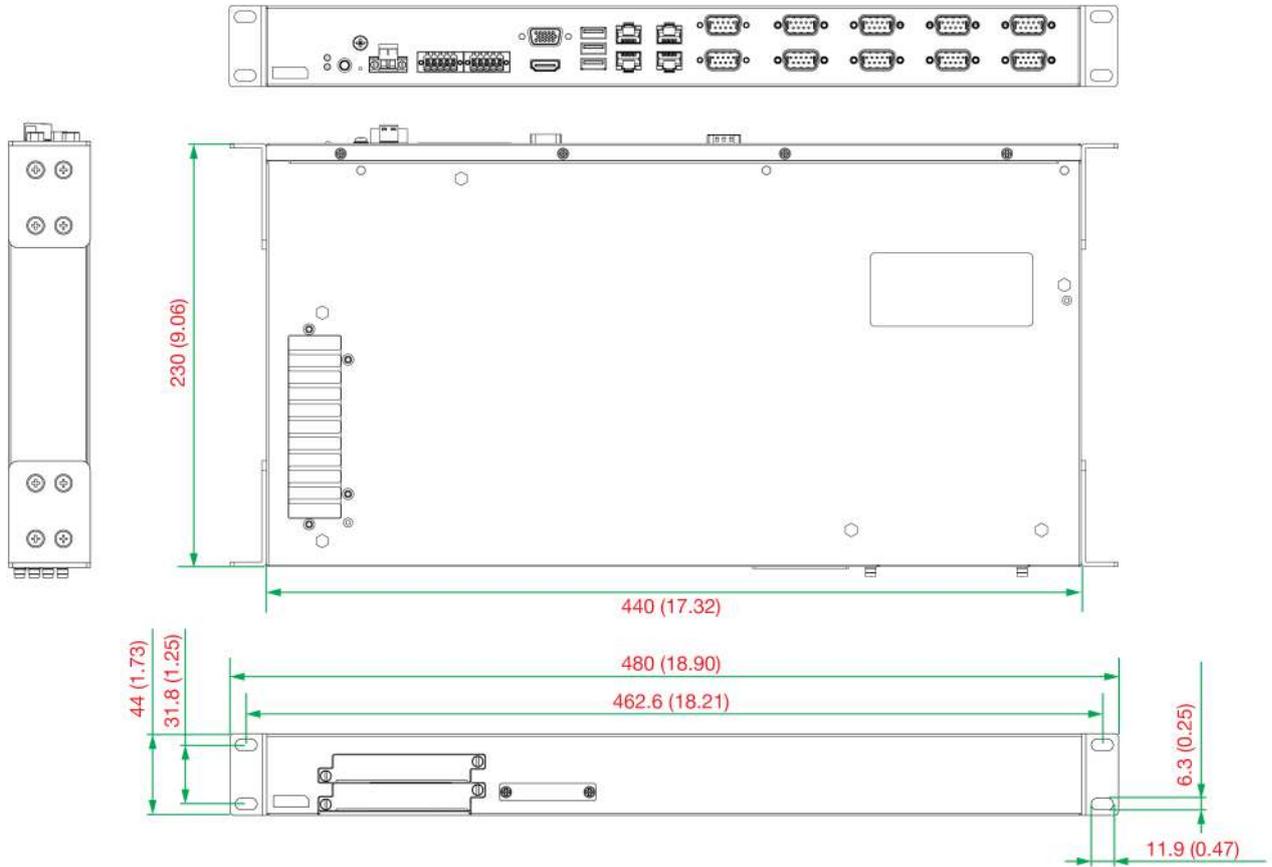

## RKP-C110-C1-2L4C-T/C3-2L4C-T/C5-2L4C-T/C7-2L4C-T Models

Unit: mm (inch)

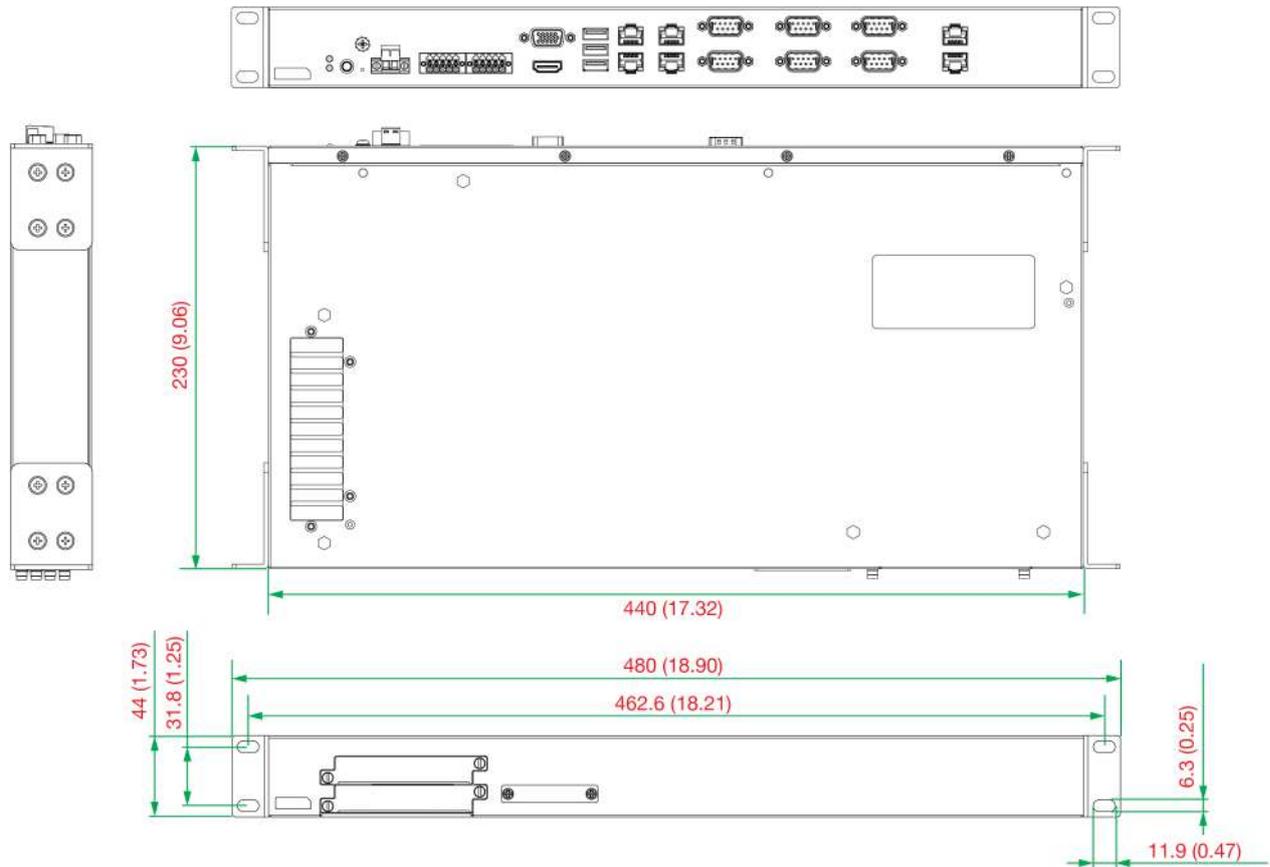

## Ordering Information

Model Name	CPU	SODIMM	Storage Slots	OS Preinstalled	LAN/Serial	USB 3.0	DIs/ DOs	Video Outputs	Power Input
RKP-C110-C1-T	Intel® Celeron® 6305E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C1-T-Win10	Intel® Celeron® 6305E	8 GB	2 x 2.5" SSD	Win 10 LTSC (64 GB SSD)	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C1-8L-T	Intel® Celeron® 6305E	8 GB	2 x 2.5" SSD	-	12/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C1-8C-T	Intel® Celeron® 6305E	8 GB	2 x 2.5" SSD	-	4/10	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C1-2L4C-T	Intel® Celeron® 6305E	8 GB	2 x 2.5" SSD	-	6/6	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C3-T	Intel® Core™ i3-1115G4E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C3-T-Win10	Intel® Core™ i3-1115G4E	8 GB	2 x 2.5" SSD	Win 10 LTSC (64 GB SSD)	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C3-8L-T	Intel® Core™ i3-1115G4E	8 GB	2 x 2.5" SSD	-	12/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC

Model Name	CPU	SODIMM	Storage Slots	OS Preinstalled	LAN/Serial	USB 3.0	DIs/ DOs	Video Outputs	Power Input
RKP-C110-C3-8C-T	Intel® Core™ i3-1115G4E	8 GB	2 x 2.5" SSD	-	4/10	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C3-2L4C-T	Intel® Core™ i3-1115G4E	8 GB	2 x 2.5" SSD	-	6/6	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C5-T	Intel® Core™ i5-1145G7E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C5-T-Win10	Intel® Core™ i5-1145G7E	8 GB	2 x 2.5" SSD	Win 10 LTSC (64 GB SSD)	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C5-8L-T	Intel® Core™ i5-1145G7E	8 GB	2 x 2.5" SSD	-	12/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C5-8C-T	Intel® Core™ i5-1145G7E	8 GB	2 x 2.5" SSD	-	4/10	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C5-2L4C-T	Intel® Core™ i5-1145G7E	8 GB	2 x 2.5" SSD	-	6/6	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C7-T	Intel® Core™ i7-1185G7E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C7-T-Win10	Intel® Core™ i7-1185G7E	8 GB	2 x 2.5" SSD	Win 10 LTSC (64 GB SSD)	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C7-8L-T	Intel® Core™ i7-1185G7E	8 GB	2 x 2.5" SSD	-	12/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C7-8C-T	Intel® Core™ i7-1185G7E	8 GB	2 x 2.5" SSD	-	4/10	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C7-2L4C-T	Intel® Core™ i7-1185G7E	8 GB	2 x 2.5" SSD	-	6/6	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	12/24 VDC
RKP-C110-C1-2HV-T	Intel® Celeron® 6305E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	100 to 240 VAC/VDC
RKP-C110-C3-2HV-T	Intel® Core™ i3-1115G4E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	100 to 240 VAC/VDC
RKP-C110-C5-2HV-T	Intel® Core™ i5-1145G7E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	100 to 240 VAC/VDC
RKP-C110-C7-2HV-T	Intel® Core™ i7-1185G7E	8 GB	2 x 2.5" SSD	-	4/2	3	8 x DIs 8 x DOs	1 x VGA 1 x HDMI	100 to 240 VAC/VDC

© Moxa Inc. All rights reserved. Updated Jul 25, 2025.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.